

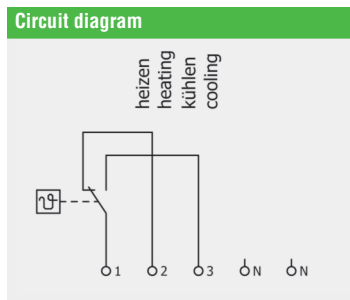




#### Application

The temperature control is an electronic two-point control integrated in a wall housing with a viewing glass in the housing cover. The control can particularly be used as circulating air thermostat and no additional temperature sensor is necessary.

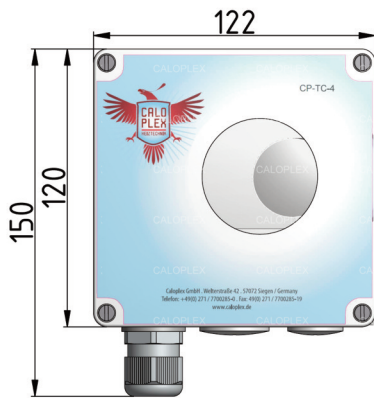

Versions	
CP-TC-4	CP-TC-4 adjustable temperature range - 20...35°C V Screw connections 1xM20, (1xM25, 1xM20 dummy plug)

General information	
Adjustment:	via rotary knob
Operating environment:	Operating temperature - 30...50°C, Humidity 35...95%
Protection class:	IP65 according to EN 60529
Material:	impact resistant ABS
Colour:	RAL 7035
Weight:	290g
Dimensions:	[122x120x55]mm [width x height x depth]

Electrical properties	
Analog input:	Bimetal
Measuring tolerance:	Bimetal ±1,5%
Outputs:	Changeover relay 1x16A/230V
Power supply:	230V AC +10/-15% 47...60Hz
Hysteresis:	~3k
Clamps:	maximum 2,5 mm <sup>2</sup>



Caloplex GmbH  
Oberhausener Straße 5  
D-57234 Wilnsdorf

Fon +49 (0) 2739 / 92490-0  
Fax +49 (0) 2739 / 92490-19

info@caloplex.de  
www.caloplex.de